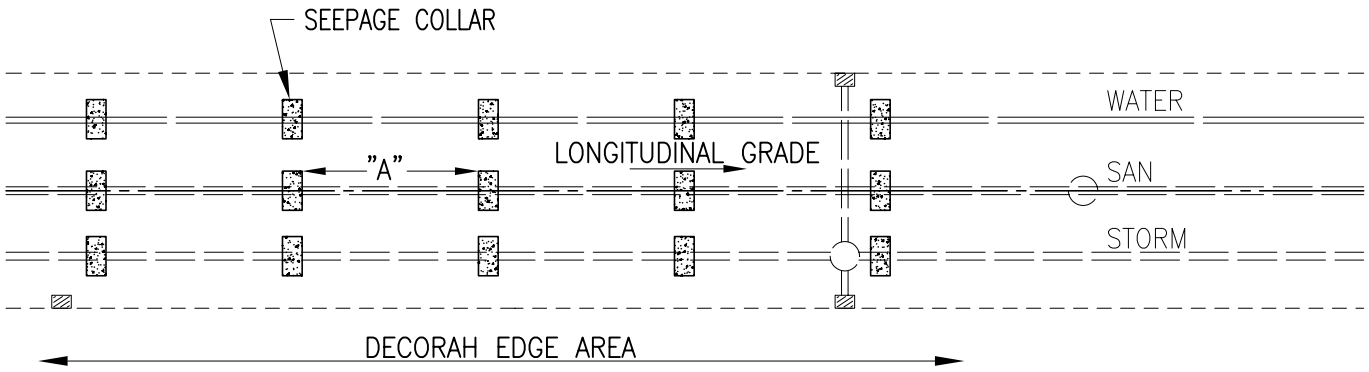

PLAN VIEW
UNDERGROUND UTILITIES

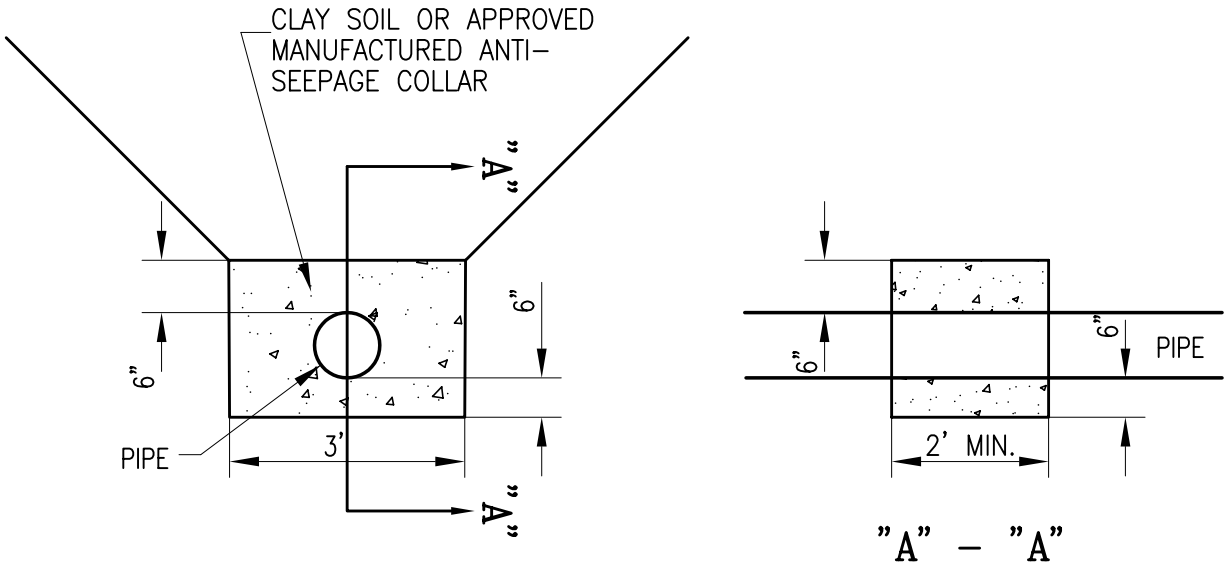

SECTION VIEW
SEEPAGE COLLAR

RECOMMENDED SPACING BETWEEN SEEPAGE COLLAR	
LONGITUDINAL GRADE	"A"
0% TO 3%	100'
3% TO 5%	50'
5% TO 10%	25'

DEPARTMENT OF PUBLIC WORKS
CITY OF ROCHESTER, MINNESOTA

DECORAH EDGE UTILITY DETAIL

ASST. CITY ENGINEER	DIRECTOR		
SHT 1 OF 1 SHTS	DATE REVISED 6/15/07	PLATE NO. 1–09	REV. A